


PONSTAR PBX SUBMERSIBLE

FEATURES

- Automatic or manual models available
- Suitable for dry running or use with sandy water
- 4x more torque, reducing problems on start-up
- Durable, Heavy-Duty pump

PERFORMANCE CURVE

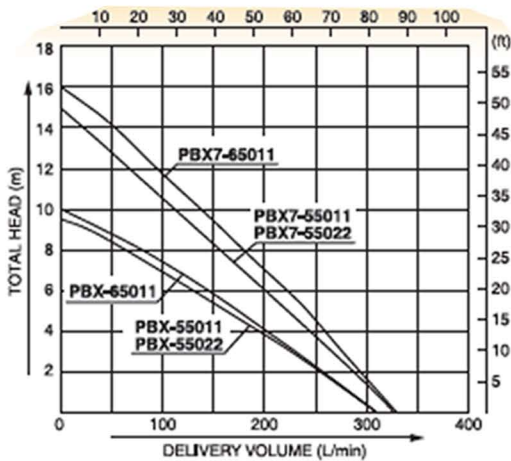

TECHNICAL

MODEL		PBX-55022	PBX-55011	PBX-65011	PBX-75022	PBX-75011	PBX-75011
Connection Dia	mm	50			50		
	inch	2			2		
Max.Head	m	9.5	10	15	16		
	ft	31	33	50	54		
Max.Delivery	L/min	310			330		
	GPH	4,870			5,240		
Output [W]		400			750		
Revolution [rpm]		2,800		3,200	2,800		3,200
Rated Current [A]		4.2	8.1	8.7	6.0	12.0	
Consumption [W]		680	690	750	1,250		
Voltage [V]		AC 220	AC 110		AC 220	AC 110	
Frequency [Hz]		50		60	50		60
Net Weight [kg]		13.4			13.6	13.7	
※without cable		13.4			13.6	13.7	